

Shear-collapsible microscale aggregates of PLGA nanoparticles with the ability to target obstructed blood vessels

El-Hammadi Mazen M¹, Otero Candelera Remedios^{2,3,4}, Martín Navarro Lucía ^{*1}, Álvarez Fuentes Josefa¹, Martín Banderas Lucía^{1,2}

¹ Department of Pharmacy and Pharmaceutical Technology, Facultad de Farmacia, Universidad de Sevilla, Sevilla, Spain.

² Instituto de Biomedicina de Sevilla (IBIS)-Campus Hospital Universitario Virgen del Rocío, Sevilla, Spain.

³ Hospital Universitario Virgen del Rocío, Sevilla, Spain.

⁴ CIBERES, Instituto de Salud Carlos III, Madrid, Spain.

*Correspondencia: lmartinnavarro@us.es

1. Introduction

Obstruction of critical blood vessels as in thrombosis and atherosclerosis is a leading cause of death and long-term adult disability worldwide. Effective treatment requires quick and invasive interventions through the systematic infusion of thrombolytic agents or the placement of a catheter in the affected vessel. Moreover, non-selective distribution of the thrombolytic drug increases bleeding risk. Blood vessels with luminal stenosis (narrowing) show a significant increase in fluid shear stress (>1000 dyne/cm²) compared to normal vessels (~70 dyne/cm²), a fact that can be exploited for targeting delivery to obstructed vessels.

The objective of present work is to prepare microscale aggregates of PLGA NPs with the ability to breakup under high shear stress into their forming NPs, which in turn adhere more effectively to the vessel surface compared with larger aggregates.

2. Materials and methods

Negatively and positively charged NPs were prepared based on poly(ethylene glycol) (PLGA) using an emulsion-solvent evaporation method. Nanoparticles surface charge was modulated by using carboxylic or amine species. Next, the microaggregates were prepared by mixing the

negatively and positively charged NPs using a high-speed homogenizer. Optimized aggregates were achieved by controlling different parameters as: (i) composition of NPs; (ii) NPs ratio; or (iii) homogenization conditions (speed, duration). The produced NPs and aggregates were extensively characterized. To test the ability of the microaggregates to collapse under high shear stress, they were injected through a microfluidic device specially designed to mimics different vascular grading stenosis (low, medium, high) (see Fig. 1).

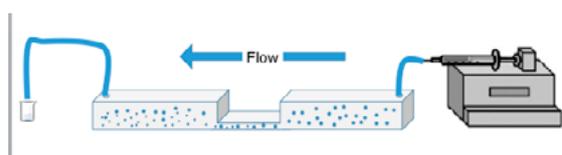


Figure 1. Set-up for shear-induced dissociation of aggregates assay

Furthermore, HUVEC cells were cultivated in the microfluidic system and labelled aggregates (Nile red-negative NPs and (FITC-positive NPs) were injected into the microchannel and observed under fluorescence microscope.

3. Results and Discussion

Particle size and zeta potential were 268.5 nm, -20.1mV and 179.2 nm, +20.9 mV for negative and positive NPs, respectively. The microaggregates

had a globular shape and an average diameter of 6.8 μm (Figure 1).

Aggregates passed through the microchannel contained ~30 % of NPs as a result of aggregates collapse under the elevated shear. In addition, examination under fluorescence microscope provided another evidence for aggregates breakup.

4. Conclusions

The PLGA-based microaggregates show promise for targeted treatment of thrombosis,

arteriosclerosis and thrombosis-associated disorders such as COVID 19 infection.

Acknowledgments

We specially thank funding from Junta de Andalucía (Consejería de Economía, Conocimiento, Empresas y Universidad) Project. Medicamentos innovadores basados en nanomedicina (AT17_5548_USE)

Authors also thank Biology and Microscopy Services from Centro de Investigación, Tecnología e Innovación (CITIUS, Universidad de Sevilla) for technical assistance.

References

1. Korin N, et al. Science. 2012;337:738-42.
2. Berrocoso E, et al. Nanomedicine. 2017;13:2623-32.

Este trabajo debe ser citado como:

El-Hammadi Mazen M, Otero Candelera R, Martín Navarro L, Álvarez Fuentes J, Martín Banderas L. Shear-collapsible microscale aggregates of PLGA nanoparticles with the ability to target obstructed blood vessels. Rev Esp Cien Farm. 2021;2(2):52-3.